

TIME




Buildings as the canvas, nature the paints, the wonder of life and secrets of nature are depicted by Time. In this work of architecture and nature, co-existence remains an eternal theme. Tree patterns or grass, waves or peaks, the diversity of nature and the inclusiveness of architecture are reflected in the passage of time. If you get closer to Time, the fragrance of nature in a variety of forms drifts. Architectural expression should not succumb to ancient glories; explore what lies ahead: an all-embracing future.

INVITAIC
Module Model



LINEAR PERFORMANCE WARRANTY

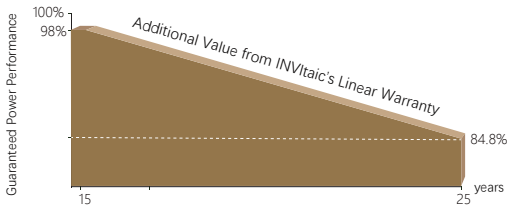

- 15** Year Product Warranty
- 25** Year Linear Power Warranty
- 0.55%** Annual Degradation Over 25 years

Glass	Heat Strengthened Glass
Junction Box	IP68 Rated
Output Cables	TUV 1x4.0 mm ² Customized Length
Maximum System Voltage	1500 VDC (IEC)
Maximum Series Fuse Rating	30 A
Power Tolerance	0 ~ ± 3 %
Temperature Coefficients of Pmax	-0.35 %/°C
Temperature Coefficients of Voc	-0.29 %/°C
Temperature Coefficients of Isc	0.048 %/°C
Nominal Operating Cell Temperature (NOCT)	45 ± 2 °C
CTM	60-84 %



Thickened Double-Layer
Tempered Glass



High Impact Resistance



50% Increased High Mechanical
Performance Modules



Optimized Soundproofing
Insulation

Higher Aesthetics

Inherent advantages of integration in module design, better appearance without metal wire exposition.

Higher Power Efficiency

Higher-density cell arrangement can put more cells per unit area and achieve higher module efficiency, meet the requirements for energy-saving buildings.

Building Integrated Higher Safety

Double layers of tempered glass to meet the requirements of building safety: with fireproofing, better wind load, heat resistance and frost resistance. Be used as building unit for integrated installation.

